



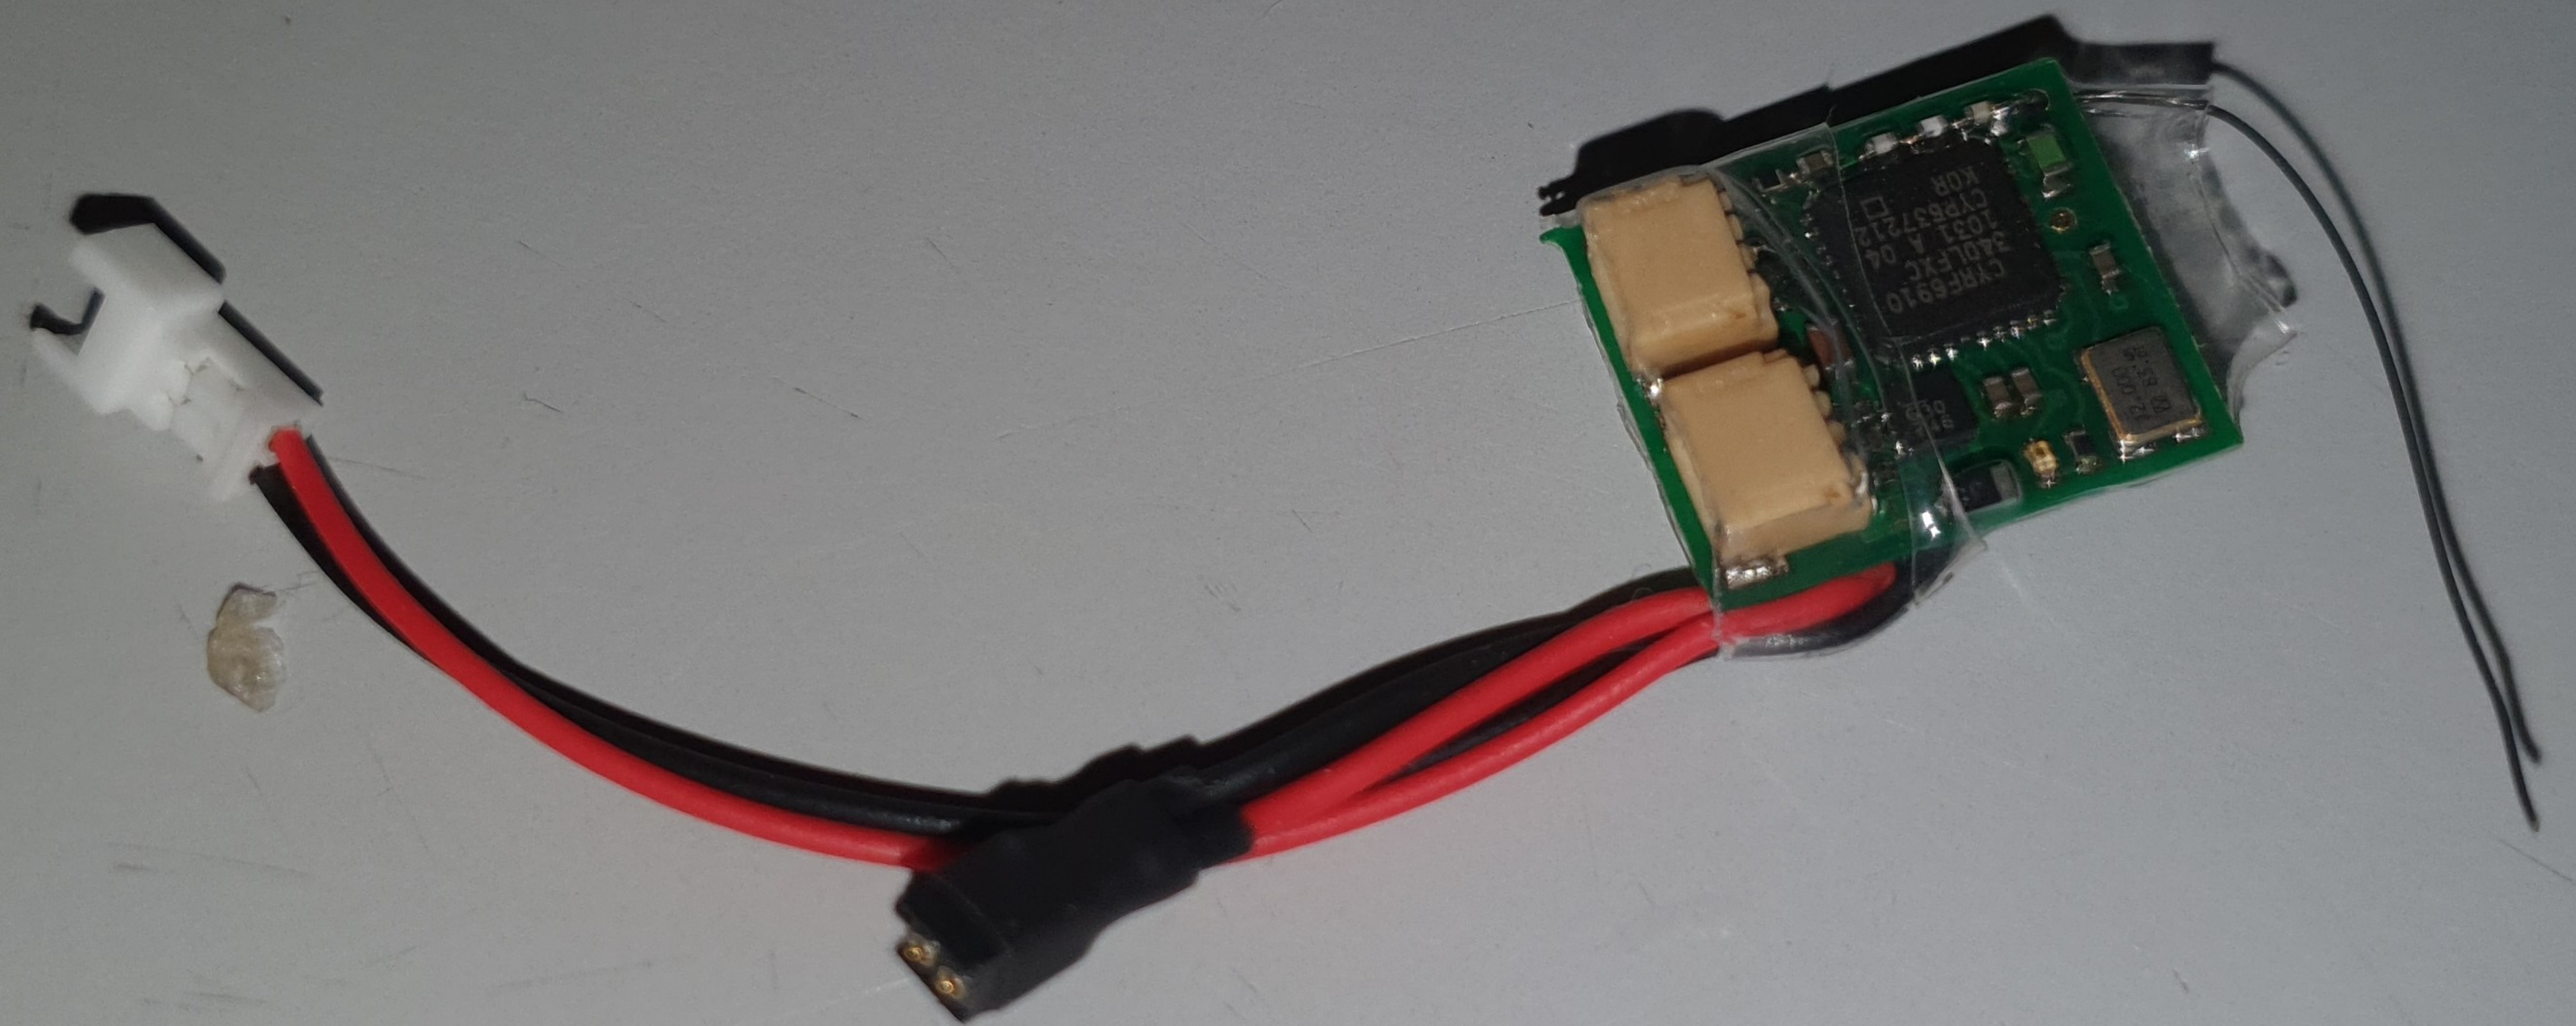

DT Receiver-DSM2/DSMX

Rx33 4/6 servo outputs

(SH) 2A Brushed ESC




Single flash every 2s = scan

Rapid flash after 30s = bind

Binding may require trying
different distances/angles

Led on = bound/good signal

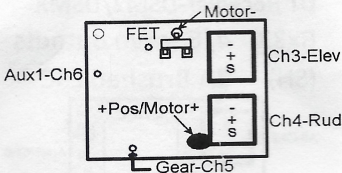

Rx requires 3-6v

Close throttle to arm ESC

Double-flash = low voltage

Do not create short circuits

Do not bend PCB

Software version 354-2

Instructions DelTang.co.uk

