


RunCam TX200U

BFCMS Control 5.8G 48CH 25/200mW Video Transmitter



5V OUT
GND
VIDEO IN

3.3~5.5V IN
GND

Button

IRC TRAMP


•TX 4

Flight controller
Take UART TX4 for example

1 1 2 3 4 5 6

1 Blue LED for Channel
1-6 Red LED for Band

Orange LED for Power

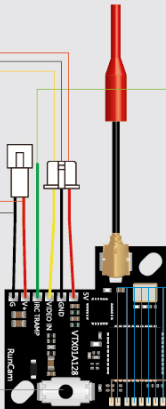

Frequency Table

Channel	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
1 Band A	5865	5845	5825	5805	5785	5765	5745	5725
2 Band B	5733	5752	5771	5790	5809	5828	5847	5866
3 Band E	5705	5685	5665	5645	5885	5905	5925	5945
4 Airwave	5740	5760	5780	5800	5820	5840	5860	5880
5 Race Band	5658	5695	5732	5769	5806	5843	5880	5917
6 Low Race	5362	5399	5436	5473	5510	5547	5584	5621